


4BW-L

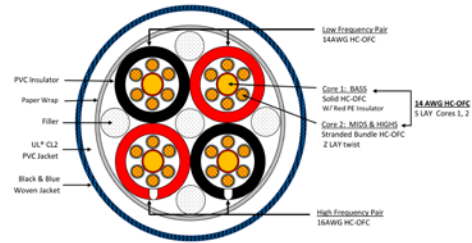

Description

Tributaries 4BW-L is a high-performance Bi-Wire Speaker cable made by hand in Orlando, Florida. The 4BW-L is designed with two 14AWG and two 16AWG High Conductivity Oxygen-Free (HC-OFC) copper conductors that are terminated with SL8 spade lugs. The conductors have a unique individually insulated dual-gauge configuration for superior sound clarity. The 4BW-L is available in each and is stocked in 4ft, 6ft, 8ft, 10ft and 12ft lengths with custom lengths available

Features

- Hand-assembled in Orlando, Florida, USA
- Tributaries Star Quad SP4BW Speaker wire reduces cables inductance & distortion
- 14AWG HC-OFC copper conductors designed for low frequency signals in Bi-Wire Applications
- 16AWG HC-OFC copper conductors designed for high frequency signals in Bi-Wire Applications
- Insulated solid conductor eliminates strand interaction / distortion with stranded bundles
- Gold-plated solid brass SL8 spade lug connectors
- Decorative woven jacket over a UL® CL2 PVC jacket
- Available in custom lengths, sold by each

Terminations

The 4BW is terminated with red & black spade lug connectors. The wires are secured by dual screw terminals in Orlando, Florida to solid gold-plated brass SL8 spade lug connectors.

Conductor

Construction	14/2 + 16/2
Material	HC-OFC Copper

Insulation

Conductor 1	PE Polyethylene
Overall Insulation Material	PVC (Red / Red & White, Black / Black & White)

Assembly

Wrap	Tissue
------	--------

Outer Jacket

Decorative Outside Jacket Cover	Woven Mesh Black with Blue
UL® CL2 Rated Jacket Color	Black
Material	PVC – Polyvinyl Chloride

4BW-L

Outside Diameter **13mm (12mm without decorative woven mesh)**

Notes

While Tributaries has made every reasonable effort to ensure the accuracy of these specifications, information contained herein may be subject to error and omission and to change without notice. Tributaries provides these specifications on an “AS IS” basis, with no representations or warranties, whether express, statutory or implied.

The cable will be packaged to preclude the inducement of damage due to handling and transportation, and will be in accordance with the best commercial practices available. Shipping containers will be constructed as to eliminate any possible damage to the cable due to shipment.

Stock Models

Stock Code	Description	Color	Quantity
4BW-L-040	Series 4 Bi-Wire with 2 SL8 > 4 SL8—4ft	Black w/Blue Decorative Mesh	Each
4BW-L-060	Series 4 Bi-Wire with 2 SL8 > 4 SL8 — 6ft	Black w/Blue Decorative Mesh	Each
4BW-L-080	Series 4 Bi-Wire with 2 SL8 > 4 SL8 — 8ft	Black w/Blue Decorative Mesh	Each
4BW-L-100	Series 4 Bi-Wire with 2 SL8 > 4 SL8 — 10ft	Black w/Blue Decorative Mesh	Each
4BW-L-120	Series 4 Bi-Wire with 2 SL8 > 4 SL8 — 12ft	Black w/Blue Decorative Mesh	Each

**Custom lengths upon request*

Packaging

Display Packaging	Re-Sealable Plastic Clamshell up thru 10ft
Bag Packaging	Zip-Lock Bag all lengths