


SP614F

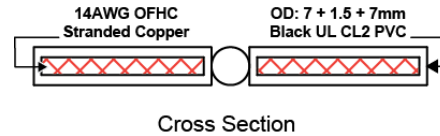

Description

Tributaries SP614F 14/2 that constructed with High Conductivity Oxygen-Free (HC-OFC) copper in a UL® rated black flexible PVC jacket. With a paintable black jacket, this cable was specially engineered as a flat speaker cable meant to be installed under carpets or baseboards, It is available on 200 foot spools

Features

- 14AWG HC-OFC copper conductors for superior signal transfer
- Designed flat for special installation needs
- Paintable black UL® CL2 PVC jacket
- Sold on 200 foot spools, custom lengths available

Conductor

Construction	14AWG
Material	HC-OFC Copper

Assembly

Jacket	Flat paintable jacket
--------	-----------------------

Outer Jacket

UL® CL2 Rated Jacket Color	Black
Material	PVC – Polyvinyl Chloride
Thickness	1.5mm

Notes

While Tributaries has made every reasonable effort to ensure the accuracy of these specifications, information contained herein may be subject to error and omission and to change without notice. Tributaries provides these specifications on an “AS IS” basis, with no representations or warranties, whether express, statutory or implied.

The cable will be packaged to preclude the inducement of damage due to handling and transportation, and will be in accordance with the best commercial practices available. Shipping containers will be constructed as to eliminate any possible damage to the cable due to shipment.

Stock Model

Stock Code	Description	Color	Put ups
SP614F-BK02S	Series 6 14/2 flat speaker cable	Paintable Black	200ft spool

**Custom lengths upon request*