


## 8V

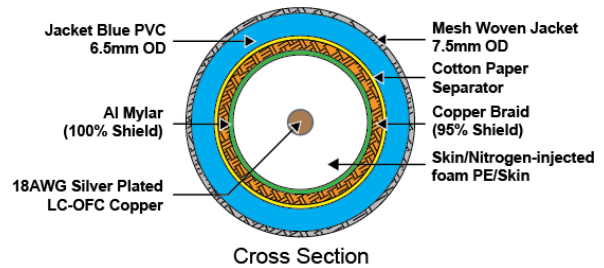

### Description

Tributaries 8V is a high-performance 75 Ohm composite video coaxial cable made by hand in Orlando, Florida. The 8V is designed with heavy RG6 18AWG 2.5% Long-Crystal Oxygen-Free (LC-OFC) copper conductors for superior signal transfer. The 8V is stocked in ½ meter to 4 meter lengths with custom lengths available.

### Features

- Hand-soldered in Orlando, Florida, USA
- Tributaries unique 360° surround soldered ground termination
- 18AWG LC-OFC copper conductor for superior signal transfer
- 2.5% silver-plated wire provides improved digital performance
- Best dielectric insulator: Skin/Nitrogen-injected foam PE/Skin
- Full body gold-plated solid brass connectors
- Decorative woven jacket over a UL® CL2 PVC jacket
- Available in custom lengths

### Terminations

The 8V is terminated with yellow 75 Ohm RCA connectors. The wires are hand-soldered with high-quality lead-free solder in Orlando, Florida to solid gold-plated brass full body RCA connectors. The shield is surround-soldered inside the collar making an ultra secure ground connection and unbeatable strain relief. The connection is protected with solid brass connector covers that have colored rings for signal identification. Additionally, this cable can be terminated in field using ProFit® CONC-6U connectors available in BNC, F and RCA.

### Conductor

Construction	18AWG
Material	2.5% Silver-Plated LC-OFC Copper

### Insulation

Insulation Material	Skin / Nitrogen-injected foam PE / Skin White
Overall Thickness	4.6mm

### Shielding

Aluminum Mylar	100% shield
OFC Copper Braid	95% shield

## 8V

### Outer Jacket

Decorative Outside Jacket Cover	Woven Mesh Black
UL® CL2 Rated Jacket Color	Blue
Material	PVC – Polyvinyl Chloride
Outside Diameter	7.5mm (6.5mm without decorative woven mesh)

### Notes

While Tributaries has made every reasonable effort to ensure the accuracy of these specifications, information contained herein may be subject to error and omission and to change without notice. Tributaries provides these specifications on an “AS IS” basis, with no representations or warranties, whether express, statutory or implied.

The cable will be packaged to preclude the inducement of damage due to handling and transportation, and will be in accordance with the best commercial practices available. Shipping containers will be constructed as to eliminate any possible damage to the cable due to shipment.

### Put-Ups and Colors

Stock Code	Description	Color	Quantity
8V-005	Series 8 Composite Video — .5m	Blue w/Black Decorative Mesh	Each
8V-010	Series 8 Composite Video — 1m	Blue w/Black Decorative Mesh	Each
8V-015	Series 8 Composite Video — 1.5m	Blue w/Black Decorative Mesh	Each
8V-020	Series 8 Composite Video — 2m	Blue w/Black Decorative Mesh	Each
8V-030	Series 8 Composite Video — 3m	Blue w/Black Decorative Mesh	Each
8V-040	Series 8 Composite Video — 4m	Blue w/Black Decorative Mesh	Each

*\*Available up to 10 meter and in custom lengths upon request*

### Packaging

Display Packaging	Re-Sealable Plastic Clamshell up thru 4m
Bag Packaging	Zip-Lock Bag all lengths